

15 kg/h • 40 kg/h

3,5 kW / 230 V A.C.  
50-60 Hz, 14 A

4,4 kW / 230 V A.C.  
50-60 Hz, 20 A

# Dry-type Vaporizer

## FAS 2000





# FAS 2000•15•40

## Dry-type Vaporizer - Capacity 15 kg/h & 40 kg/h

The vaporizer units FAS 2000-15 and FAS 2000-40 were constructed for a stable LPG supply in independent gas supply systems with low capacities.

### Characteristics:

- Independency of gas mixture (propane, butane or propane-butane-mixture)
- 2-stage-safety system (2 solenoid valves in vaporizer inlet)
- Connection pipe screwing inlet 12 mm / outlet 12 mm
- Plug-in version ready for connection
- Suitable for installation in hazardous areas of zone 2
- ignition protection type CE Ex II 3G Ex nR II T4
- CE-mark according to PED 97/23/EC, with nameplate CE 0685, incl. declaration of conformity


### Technical Data:

Manufacturer	FAS Germany
Type	Dry-type vaporizer
Capacity	15 kg/h, respectively 40 kg/h
Gas temperature outlet	max. 70° C
Connection of version 15 kg/h	3,5 kW, 230 V, 50/60 Hz, 14 A, 1-phase *
Connection of version 40 kg/h	4,4 kW, 230 V, 50/60 Hz, 20 A, 1 phase *
Max. pressure	25 bar

(\*option 220 - 240 V)

### Operation parameters:

Diameter of pipe	12 mm
Cable cross section not less than	2,5 mm <sup>2</sup>
Dimensions / Weight	518 x 163 x 355 mm, 25 kg
Warranty	12 months

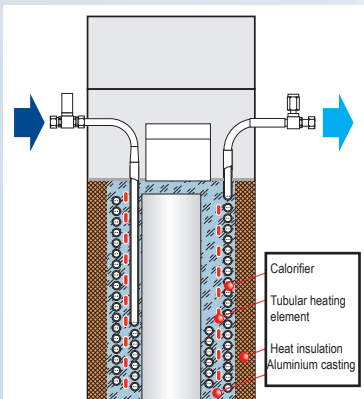

Schematic drawing